


Schauglas/Sight Glass

Druck-Temperatur-Diagramm/Pressure-Temperature Diagram

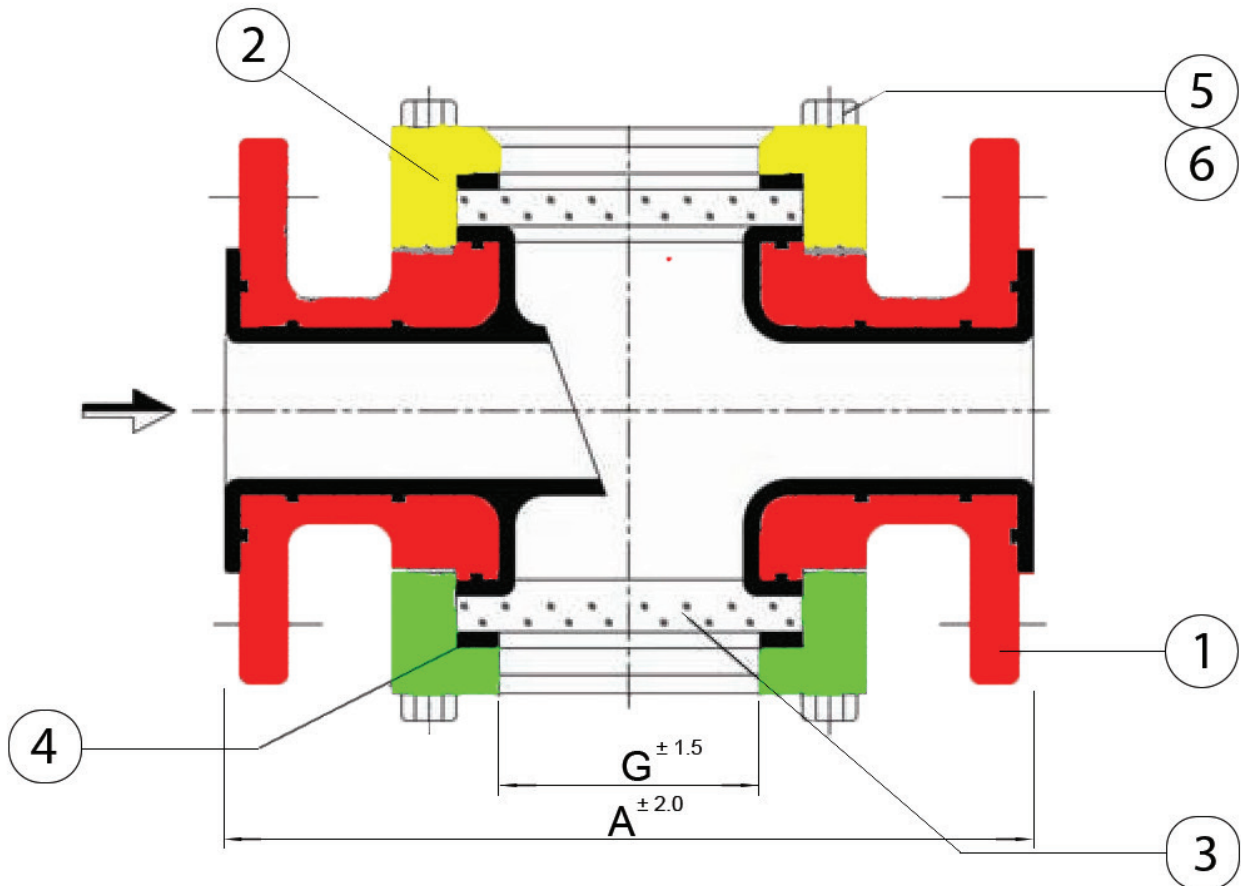

Baugröße Size	A DIN (mm)	A*ANSI (mm)	øG	Verschrg Screws	Gewicht/Weight DIN (kg) ANSI (kg)
DN 15 - 1/2"	130	130* <sup>2</sup>	32	4 x M10	3,0 3,0
DN 20 - 3/4"	150	150* <sup>2</sup>	32	4 x M10	4,0 4,0
DN 25 - 1"	160	152	48	4 x M12	5,5 4,8
DN 40 - 1 1/2"	200	178	65	4 x M16	9,6 8,8
DN 50 - 2"	230	203	80	4 x M16	12,5 11,5
DN 80 - 3"	310	241	100	8 x M16	25,5 22,0
DN 100 - 4"	350	292	125	8 x M16	31,6 28,8
DN 150 - 6"	480* <sup>2</sup>	356* <sup>3</sup>	142	8 x M20	68,0 62,0
DN 200 - 8"	600* <sup>2</sup>	457* <sup>3</sup>	190	8 x M20	88,0 82,0
DN 250 - 10"	533* <sup>3</sup>	533* <sup>3</sup>	220	8 x M20	115,0 100,0

\*<sup>2</sup> Baulänge gemäß DIN EN 3202-F1

\*<sup>3</sup> Baulänge gemäß ANSI EN 558-F12

Schauglasflansch quadratisch bis DN50, ab DN80 rund

\*<sup>2</sup> Length according to DIN EN 3202-F1

\*<sup>3</sup> Length according to ANSI EN 558-F12

Sight glass flange square form up to DN50, from DN80 onwards round